


Reference to : JASO D608

This cable has excellent resistance to heat. It is used for wiring in high temperature areas such as engine compartment. AVSSX cables have thinner insulation than AVX cables.

Heat resistance category : 100°C

Construction :

- Conductor** — Stranded annealed copper wires
- Insulation** — Radiation Cross-linked PVC

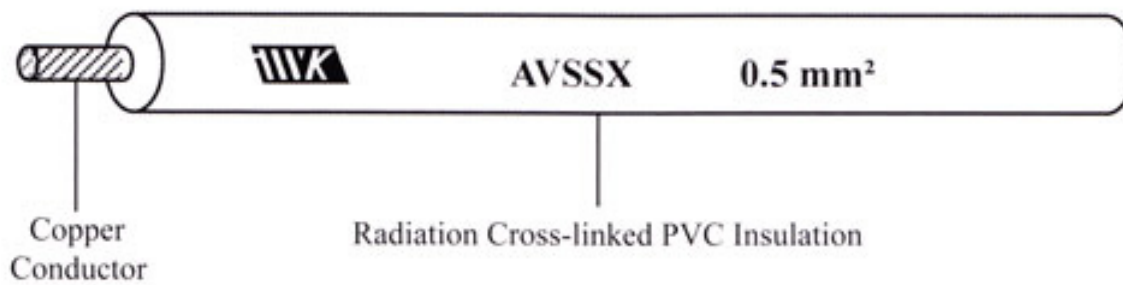

Nominal Cross-sectional Area	Conductor			Nominal Insulation thickness mm	Overall Diameter		Conductor resistance at 20°C ohm/km
	Stranding No./mm	Calculated area mm²	Approx. diameter mm		Standard mm	Max. mm	
0.5 f	19/0.19	0.5387	1.0	0.3	1.6	1.7	34.6
0.75 f	19/0.23	0.7894	1.2	0.3	1.8	1.9	23.6
1.25 f	37/0.21	1.282	1.5	0.3	2.1	2.2	14.6
2 f	37/0.26	1.964	1.8	0.4	2.6	2.7	9.50

Remark: The symbol "f" in column "Nominal Cross-sectional Area" means flexible